
## **6] WIRING DIAGRAM**

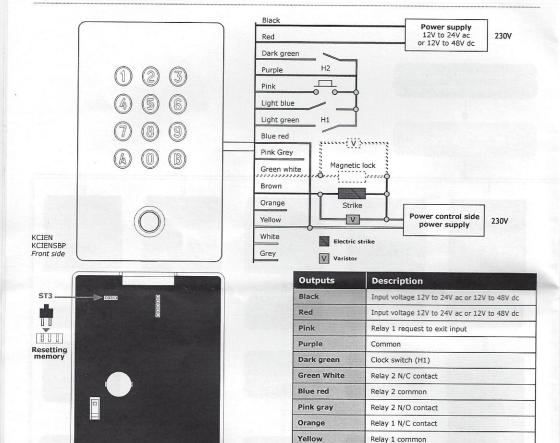

Brown

White

Grey

Light blue

Light green

Relay 1 N/O contact

User code change

Tamper switch output

Tamper switch output

Request-to- enter input

This product is supplied with a varistor.

It should be mounted on the terminal of electric release (electromagnetic lock, solenoid bolt, etc ...) controlled by the device. If this device controls more than one electronic release, then each lock should be fitted with a varistor. The varistor controls the overload produced by the strike coil - back emf. It is recommended to use a separate power supply when using a Shear Lock Magnet.



cdvi.com cdvigroup.com

KCIEN KCIENSBP Back side