SCHEMATIC DIAGRAM

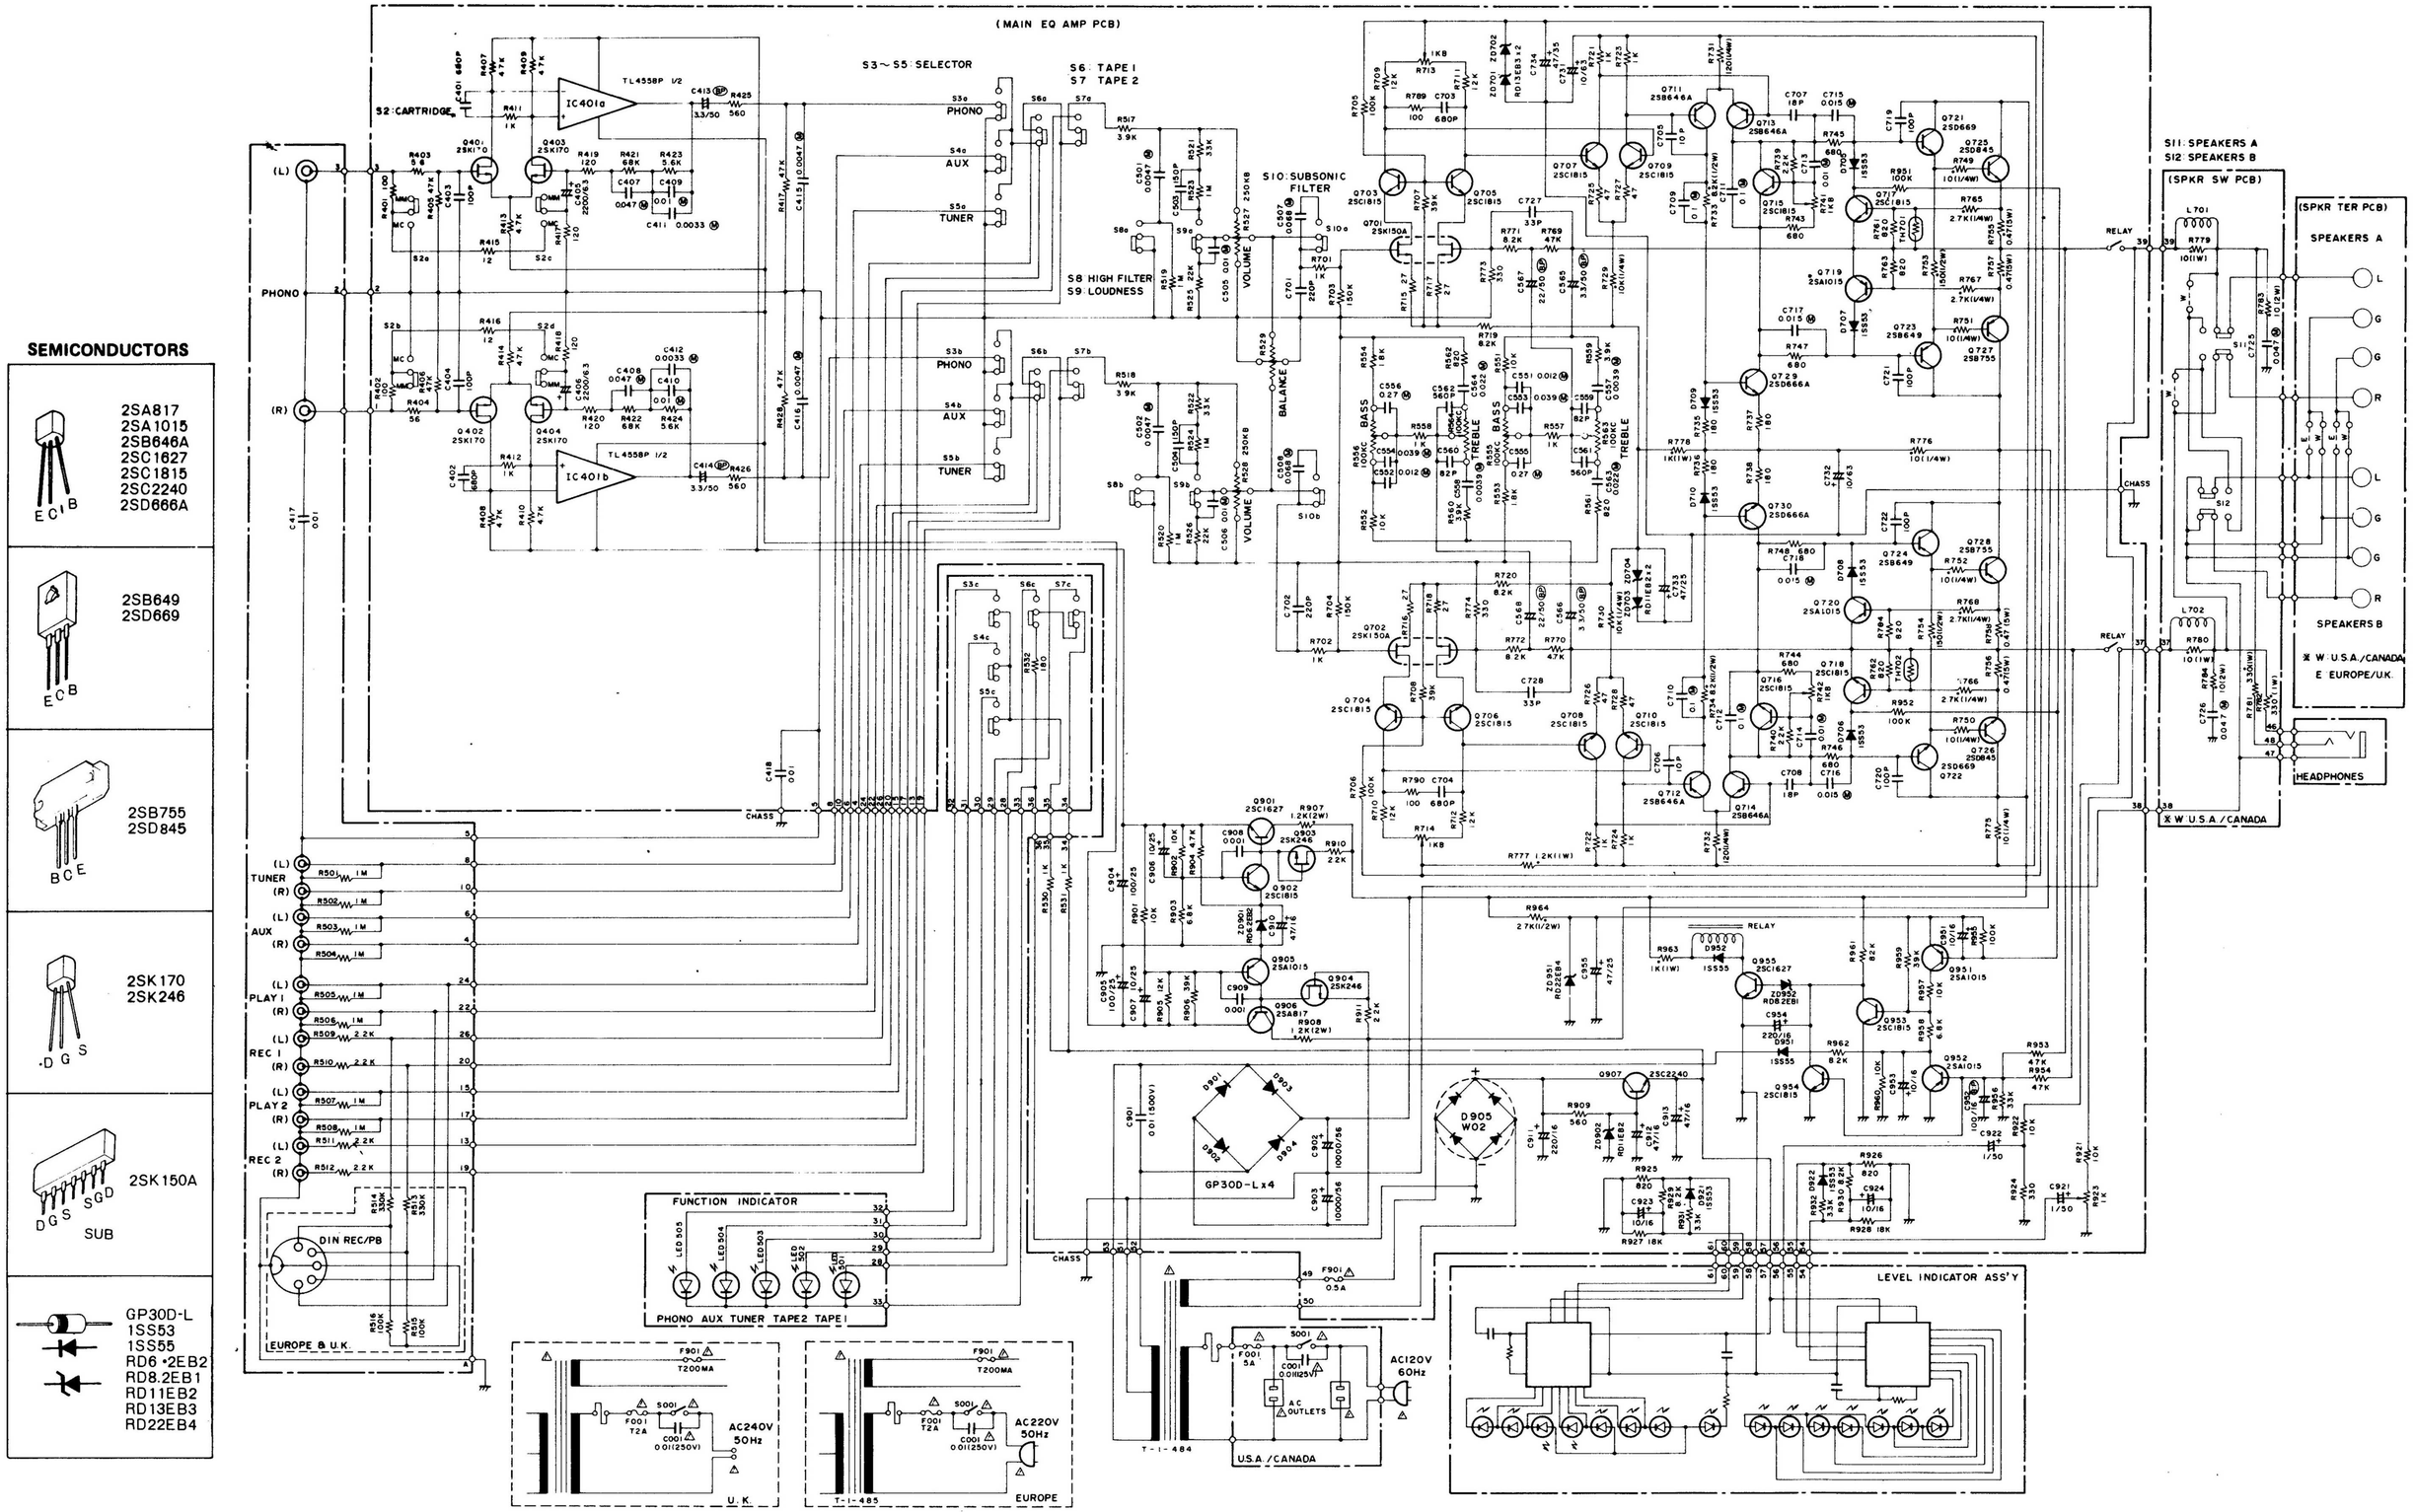

SEMICONDUCTORS

2SA817 2SA1015 2SB646A 2SC1627 2SC1815 2SC2240 2SD666A	E C B
2SB649 2SD669	E C B
2SB755 2SD845	B C E
2SK170 2SK246	D G S
2SK150A	D G S S G D SUB
GP30D-L 1SS53 1SS55 RD6 •2EB2 RD8.2EB1 RD11EB2 RD13EB3 RD22EB4	

NOTES:

1. SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VARUES ARE IN OHMS. K = 1,000 ; M = 1,000,000
3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF, M = μF), LESS THAN 1.0 ARE IN μF. (ELECTROLYTIC CAPACITANCE VALUES ARE IN μF/WV.)

SCHEMATIC SYMBOLS:

- Ⓜ POLYESTER FILM CAPACITOR
- (BP) BIPOLAR CAPACITOR
- ● NONFLAMMABLE RESISTOR

WARNING:

⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.