


FEATURES

- ◆ Wide operating voltage range of 10..45Vdc
- ◆ PWM control for coil currents of 40..300mA
- ◆ Coil current for energize and hold modes set by an external resistor
- ◆ Coil current monitored during energize mode, detection of load breakage and voltage errors
- ◆ Automatic current reduction after 100ms to reduce the power consumption in hold mode
- ◆ The internal free-wheeling alteration function supports PWM operation and quick demagnetizing during shutdown
- ◆ Status report given at the current-limited LED output
- ◆ Shutdown with excessive temperature and low voltage
- ◆ Integrated oscillator needs no external components
- ◆ PWM frequency is beyond audible range
- ◆ Protective circuitry against damage by ESD
- ◆ Minimum space requirements, few external components

APPLICATIONS

- ◆ PWM drive for inductive loads (e.g. relays, electrovalves)
- ◆ Relay low/high-side switch

PACKAGES




PDIP8



SO8

BLOCK DIAGRAM

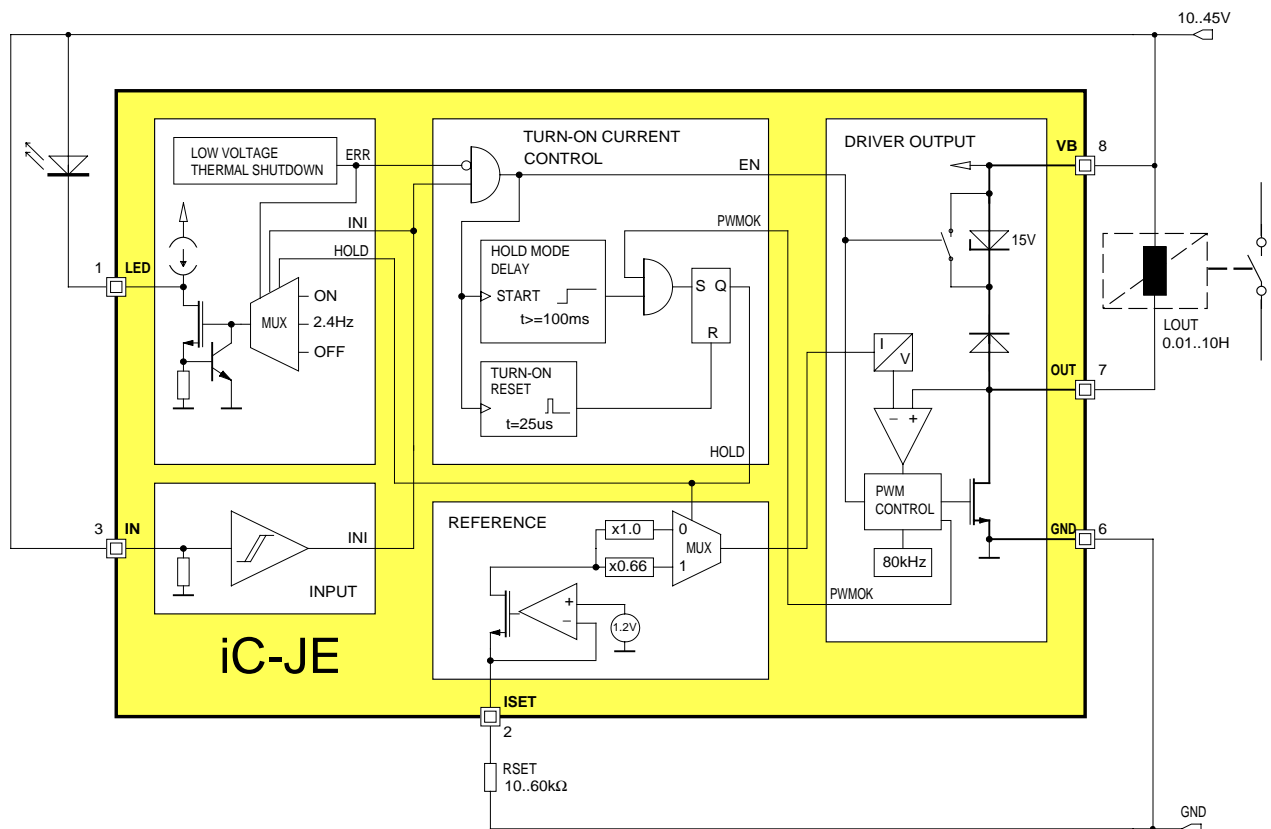

iC-JE

PWM RELAY/SOLENOID DRIVER



Rev D0, Page 2/10

DESCRIPTION

iC-JE is a PWM driver for inductive loads, such as relay coils, solenoid valves and small DC motors.

The setpoint for the coil current is preset with the help of the RSET external resistor. 60..300mA can be set for energize mode which then automatically drop to 2/3 of this value (40..200mA) during hold mode. The device is switched to hold mode after 100ms provided that the set coil current is obtained during energizing (PWMOK= 1).

The changeover between energize and hold modes is suitable for typical relay drives which require a powerful initial energizing current which can then be reduced after closing the air gap in a magnetic circuit. The quadratic dependence on the current intensity means that the power dissipation of the system is more than halved through this reduction.

The output current is measured with zero loss at the power transistor's ON resistance and compared to the setpoint. In order to maintain this setpoint, the switch-on time of the coil driver is modulated by the pulse width. The internal flyback diode maintains the current during the switching pauses. The switching frequency of ca. 80kHz is provided by the internal oscillator.


The device is shutdown by a Io signal at input IN or the removal of the power supply; the current reduction in the coil is supported by the changeover of the free-wheeling circuit. The Zener diode now active permits higher free-wheeling voltages and thus a quicker demagnetizing of the coil.

The status indicator LED is constantly on when hold mode is functioning correctly and flashes with low voltage, excessive temperature or when the coil current in energize mode has not reached the setpoint. The driver output is shutdown with low voltage or excessive temperature.

The device is protected against destruction by ESD.

PACKAGES PDIP8, SO8 to JEDEC Standard


PIN CONFIGURATION PDIP8 (top view)



PIN FUNCTIONS

No.	Name	Function
1	LED	State monitor
2	ISET	PWM Reference Current (setpoint adjustment)
3	IN	Input
4	n.c.	
5	n.c.	
6	GND	Ground
7	OUT	PWM Output
8	VB	+10 to 45V Supply Voltage

PIN CONFIGURATION SO8 (top view)

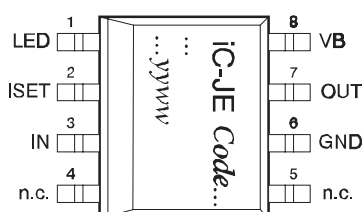

ABSOLUTE MAXIMUM RATINGS

Values beyond which damage may occur; device operation is not guaranteed.

Item	Symbol	Parameter	Conditions	Fig.			Unit
					Min.	Max.	
G001	V(VB)	Voltage at VB			-0.3	48	V
G002	I(VB)	Current in VB			-350	6	mA
G003	V(OUT)	Voltage at OUT			-0.3	60	V
G004	I(OUT)	Output Current in OUT			-6	350	mA
G005	V(LED)	Voltage at LED			-0.3	VB	V
G006	I(LED)	Current in LED			-6	8	mA
G007	V(ISET)	Voltage at ISET			-0.3	48	V
G008	I(ISET)	Current in ISET			-6	6	mA
G009	V(IN)	Voltage at IN			-0.3	48	V
G010	I(IN)	Current in IN			-6	6	mA
TG1	Tj	Junction Temperature			-40	150	°C
TG2	Ts	Storage Temperature			-40	150	°C

THERMAL DATA

Operating Conditions: VB= 10..45V, LOUT= 0.01..10H, RSET= 10..60kΩ

Item	Symbol	Parameter	Conditions	Fig.				Unit
					Min.	Typ.	Max.	
T1	Ta	Operating Ambient Temperature Range			-25		80	°C
T2	Rthja	Thermal Resistance Chip / Ambient	PDIP8 package				110	K/W
T3	Rthja	Thermal Resistance Chip / Ambient	SO8 package				140	K/W

All voltages are referenced to ground unless otherwise noted.

All currents into the device pins are positive; all currents out of the device pins are negative.

iC-JE

PWM RELAY/SOLENOID DRIVER



ELECTRICAL CHARACTERISTICS

Operating Conditions: $V_B = 10..45V$, $L_{OUT} = 0.01..10H$, $R_{SET} = 10k..60k\Omega$, $T_j = -25..125^\circ C$, unless otherwise noted.
LED connected or pin LED linked to GND.

Item	Symbol	Parameter	Conditions	Tj °C	Fig.				Unit
						Min.	Typ.	Max.	
Total Device									
001	V_B	Permissible Supply Voltage Range				10		45	V
002	$I(V_B)$	Supply Current in V_B	Outputs OUT, LED disabled			0.5		2	mA
003	$I(V_B)$	Supply Current in V_B	Output OUT enabled			0.5		3	mA
004	$V_c(lo)$	Clamp Voltage lo at all Pins	$I() = -4mA$, other Pins open			-1.4		-0.3	V
005	$V_c(hi)$	Clamp Voltage hi at V_B , IN, ISET	$I() = 4mA$, other Pins open			48	57		V
006	$V_c(hi)$	Clamp Voltage hi at OUT	$I(OUT) = 4mA$, other Pins open			60	71		V
007	$V_c(hi)$	Clamp Voltage hi at LED vs. V_B	$V_c(hi) = V(LED) - V(V_B)$ $I(LED) = 4mA$, other Pins open			0.3		1.4	V
Driver Output OUT									
101	$V_s(lo)$	Saturation Voltage lo	$I(OUT) = 200mA$		1		360	600	mV
102	$V_s(lo)$	Saturation Voltage lo	$I(OUT) = 300mA$		1		550	850	mV
103	PWMthi	Permissible Energizing Current			1			300	mA
104	PWMthi	Permissible Hold Current			1	40			mA
105	$I_{sc}()$	Short-circuit Current	$V(OUT) = V_B$			0.6	1	1.7	A
106	$V_c(hi)$	Clamp Voltage hi at PWM-Free-Wheeling	$V_c(hi) = V(OUT) - V_B$; $I_N = hi$, $I(OUT) = 200mA$		1		1	1.5	V
107	$V_c(hi)$	Clamp Voltage hi at PWM-Free-Wheeling	$V_c(hi) = V(OUT) - V_B$; $I_N = hi$, $I(OUT) = 300mA$		1		1.4	2	V
108	$V_c(off)$	Clamp Voltage hi at Turn-off	$V_c(hi) = V(OUT) - V_B$; $I_N: hi \rightarrow lo$, $I(OUT) = 200mA$		1	12	15	17	V
109	$I_{IK}()$	Leakage Current	$I_N = lo$, $V(OUT) = 0..V_B$				1	10	μA
110	$t_{won}(min)$	Minimum PWM Turn-on Duration	$I_N = hi$, ISET open		1	250		1000	ns
111	C()	Permissible Load Capacitance						1	nF
Input IN									
201	$V_t(on)$	Threshold Voltage hi				2.6	2.85	3.2	V
202	$V_t(off)$	Threshold Voltage lo				1.7	2.0	2.3	V
203	$V_t(hys)$	Hysteresis	$V_t(hys) = V_t(on) - V_t(off)$			0.7	0.85	1.1	V
204	$I_{pd}()$	Pull-down Current	$V(IN) = 4..45V$			50	100	200	μA
205	$R_{pd}()$	Pull-down Resistor	$V(IN) = 0..4V$			20	50	80	k Ω
206	$t_p(IN-OUT)$	Turn-on Delay	$I_N: lo \rightarrow hi$					20	μs
207	$t_p(IN-OUT)$	Turn-off Delay	$I_N: hi \rightarrow lo$					10	μs
208	$t_p(V_B-OUT)$	Turn-on Delay when V_B is powered up	$I_N = V_B$, $V_B = V_{Boff} \rightarrow V_{Bon}$					40	μs
209	$t_p(IN-LED)$	Delay Time from IN to LED (with light permanently on)	PWMOK = 1 before $t_p(PMWlo)$			65	100	135	ms
210	$t_p(IN-LED)$	Delay Time from IN to LED (with light flashing)	PWMOK = 0			130	200	270	ms

iC-JE

PWM RELAY/SOLENOID DRIVER



Rev D0, Page 5/10

ELECTRICAL CHARACTERISTICS

Operating Conditions: $V_B = 10..45V$, $L_{OUT} = 0.01..10H$, $R_{SET} = 10k..60k\Omega$, $T_j = -25..125^\circ C$, unless otherwise noted.
LED connected or pin LED linked to GND.

Item	Symbol	Parameter	Conditions	Tj °C	Fig.				Unit
						Min.	Typ.	Max.	
State Monitor LED									
301	Ipd()	Pull-down Current	V(LED)= 5V..VB			3	5	8	mA
302	Vs()lo	Saturation Voltage lo	I(LED)= 200 μ A					0.4	V
303	Ipu()	Pull-up Current	V(LED)= 0V..(VB-1V)			-20	-100	-300	μ A
304	VBlo	Permissible Supply Voltage for Monitoring Function				6		45	V
305	VBon	Turn-on Threshold at VB				7.6	8	8.4	V
306	VBoff	Undervoltage Threshold at VB	decreasing voltage VB			7.1	7.5	7.9	V
307	VBhys	Hysteresis	VBhys= VBon-VBoff			200	500	800	mV
308	Toff	Thermal Shutdown Temperature				130	140	150	°C
309	Ton	Thermal Lock-on Threshold	decreasing temperature			110	120	130	°C
310	Thys	Thermal Shutdown Hysteresis	Thys= Toff-Ton			10	20	30	°C
311	f()	Flash Frequency on Error	ERR= hi or PWMOK= 0 VB= 6..45V			1.8	2.4	3.6	Hz
Reference ISET									
401	V()	Reference Voltage				1.14	1.20	1.26	V
402	Isc()	Short-Circuit Current	V(ISET)= 0V			-2.5	-1.8	-0.3	mA
403	K1	Transfer Value for Energizing Current RSET= K1 / I(OUT)start	I(OUT)start= 60..150mA			2900	3250	3600	A Ω
404	K1	Transfer Value for Energizing Current RSET= K1 / I(OUT)start	I(OUT)start= 150..300mA			2900	3250	3600	A Ω
405	CRrel	Relative Current Ratio It(OUT)hold / It(OUT)start (Trigger Thresholds Ratio: Hold vs. Energize Mode)	I(OUT)start= 60..150mA		1	63	66	69	%
406	CRrel	Relative Current Ratio It(OUT)hold / It(OUT)start (Trigger Thresholds Ratio: Hold vs. Energize Mode)	I(OUT)start= 150..300mA		1	63	66	69	%
407	K2	Transfer Value for Hold Current RSET= K2 / I(OUT)hold	I(OUT)hold= 40..100mA			1930	2160	2400	A Ω
408	K2	Transfer Value for Hold Current RSET= K2 / I(OUT)hold	I(OUT)hold= 100..200mA			1930	2160	2400	A Ω
Oscillator									
501	fosc	Oscillator Frequency			1	60	80	120	kHz
Turn-on Current Control									
601	tpPWMlo	Hold Mode Propagation Delay	PWMOK= 1 before tpPWMlo			65	100	135	ms

ELECTRICAL CHARACTERISTICS: Diagrams

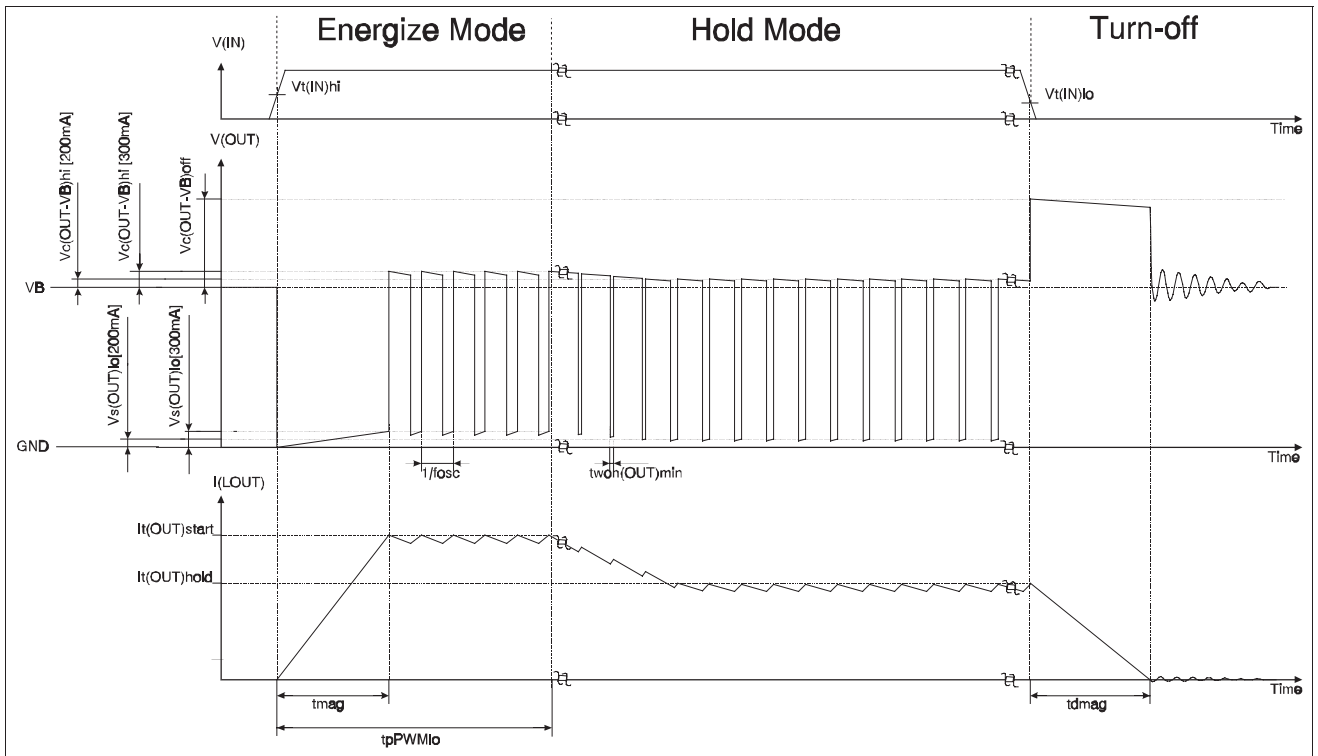


Fig. 1: operation modes: energize mode, hold mode and turn-off

$$t_{mag} \approx \frac{It(OUT)_{start} \times LOUT}{VB} \quad (1)$$

$$t_{dmag} \approx \frac{It(OUT)_{hold} \times LOUT}{Vc(OUT - VB)_{hi}} \quad (2)$$

APPLICATIONS INFORMATION

Setting the coil current

The following equations can be given for the energize and hold modes of the PWM control using Electrical Characteristics Nos. 403 to 408:

$$R_{SET} = \frac{K1}{I(OUT)_{start}} \quad (3)$$

$$R_{SET} = \frac{K2}{I(OUT)_{hold}} \quad (4)$$

Example: For a relay with a starting current of 100mA (66mA hold current) RSET is calculated as:

$$R_{SET} = \frac{3250\Omega A}{0.1A} = 32.5k\Omega \quad (5)$$

Application circuits:

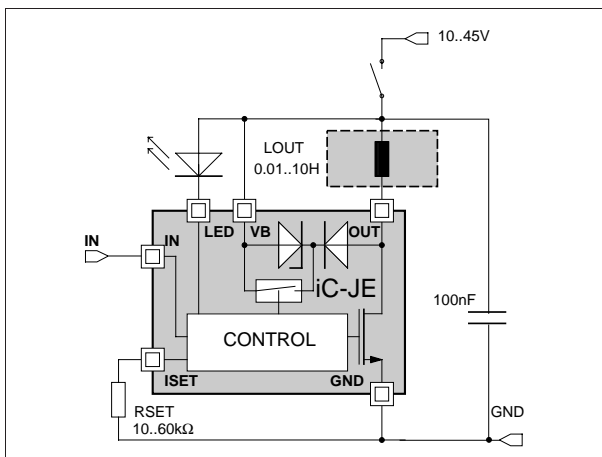


Fig. 2: driver/relay combination activated via the external control input IN.

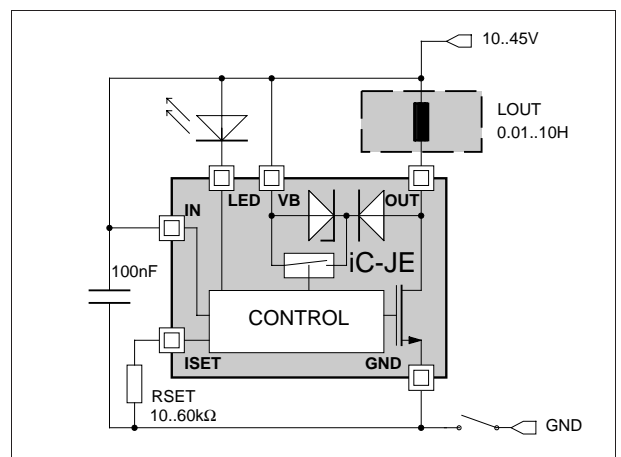


Fig. 3: driver/relay combination activated via the supply pin GND.

iC-JE

PWM RELAY/SOLENOID DRIVER

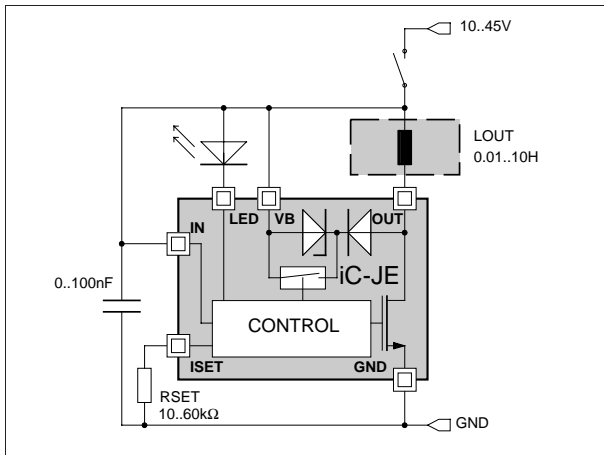


Fig. 4: driver/relay combination activated via the supply pin VB.

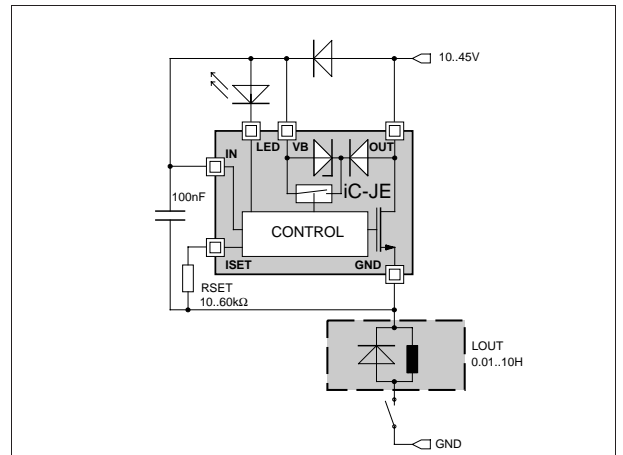


Fig. 5: high-side driver for an external relay with a flyback diode.

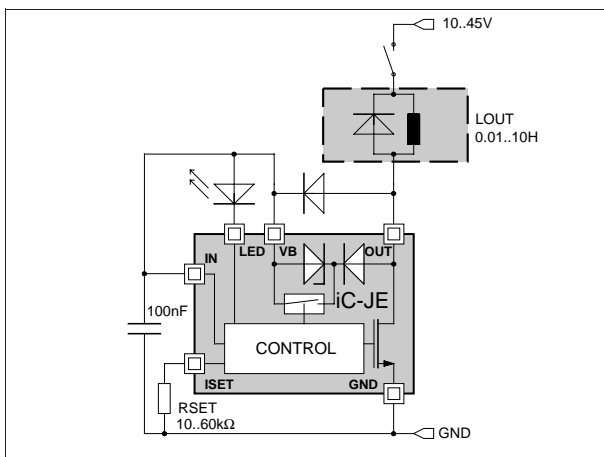


Fig. 6: low-side driver for an external relay with a flyback diode.

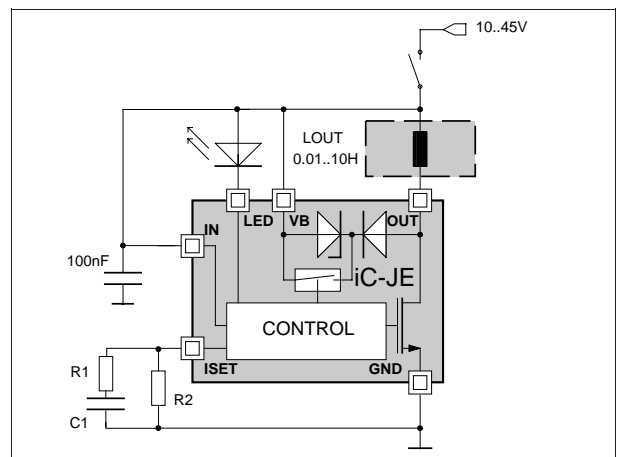


Fig. 7: increased energizing current due to the parallel RC-circuit.

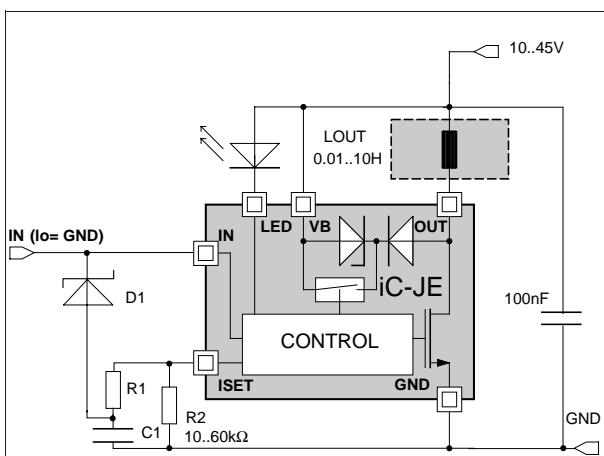


Fig. 8: activation via pin IN with an increased energizing current. An additional Schottky diode discharges C1 if IN is switched to low(GND).

iC-JE

PWM RELAY/SOLENOID DRIVER



DEMO BOARD

The iC-JE is equipped with a Demo Board for test purposes. The following figures show the wiring as well as the top and bottom layout of the test PCB.

The board comes with a strap between IN and SENSE1 (application equal to fig.4). The actual coil current can be measured by the voltage drop between SENSE1 and SENSE2 (1mV/mA).

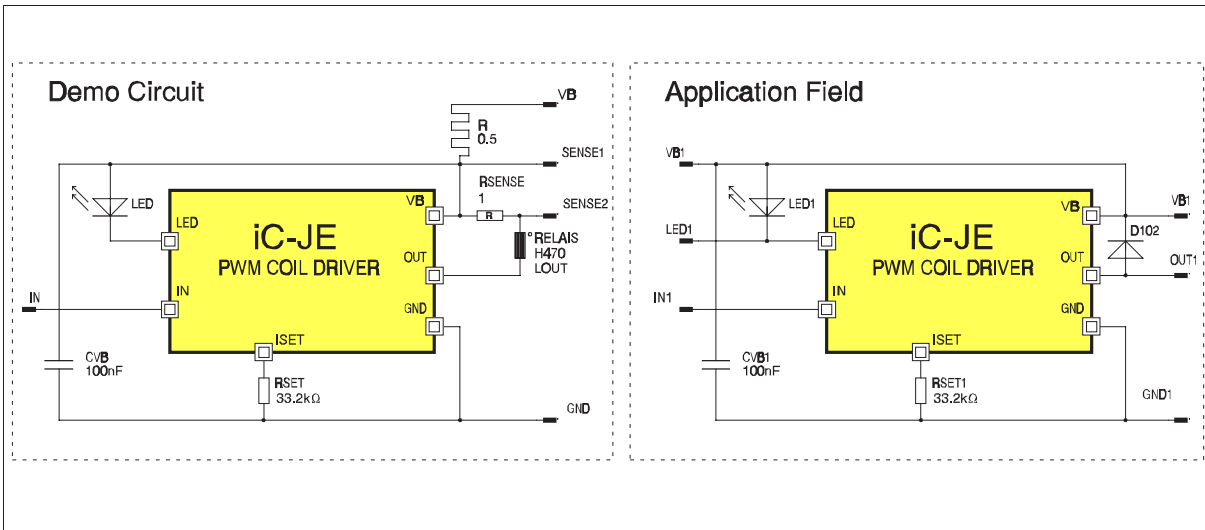


Fig. 7: schematic diagram of the Demo Board

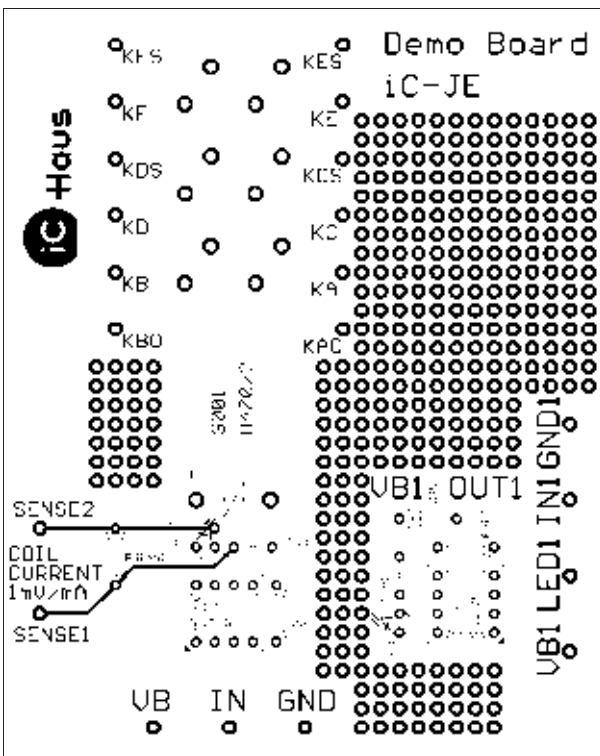


Fig. 8: demo board (components side)

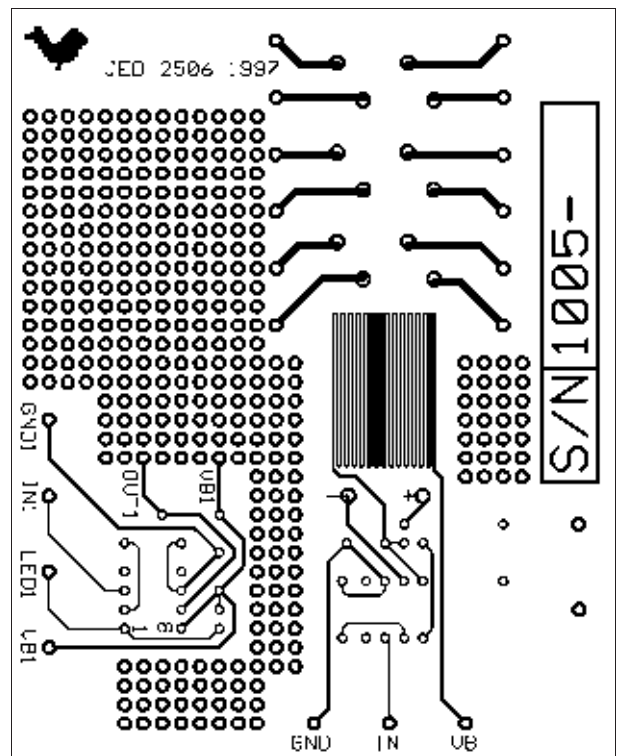


Fig. 9: demo board (solder dip side)

iC-JE

PWM RELAY/SOLENOID DRIVER

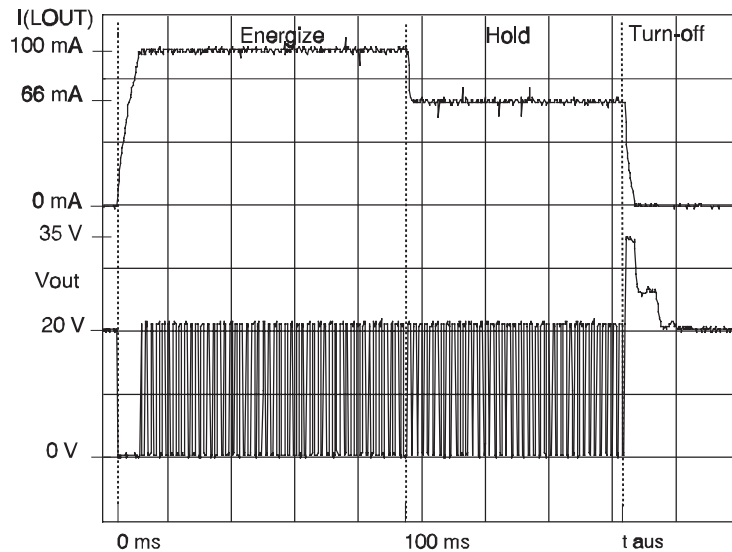


Fig. 10: oscilloscope graph of the demo circuit (sampled)

ORDERING INFORMATION

Type	Package	Order designation
iC-JE	PDIP8	iC-JE PDIP8
iC-JE	SO8	iC-JE SO8
JE Demo Board		JE Demo

For information about prices, terms of delivery, options for other case types, etc., please contact:

iC-Haus GmbH
Am Kuemmerling 18
D-55294 Bodenheim
GERMANY

Tel +49-6135-9292-0
Fax +49-6135-9292-192
<http://www.ichaus.com>

This specification is for a newly developed product. iC-Haus therefore reserves the right to modify data without further notice. Please contact us to ascertain the current data. The data specified is intended solely for the purpose of product description and is not to be deemed guaranteed in a legal sense. Any claims for damage against us - regardless of the legal basis - are excluded unless we are guilty of premeditation or gross negligence.

We do not assume any guarantee that the specified circuits or procedures are free of copyrights of third parties. Copying - even as an excerpt - is only permitted with the approval of the publisher and precise reference to source.