



IDLE CURRENT ADJUSTMENT
 If meter reads is high, cut resistor R49 (R50).
 If meter reads is low, cut resistor R45 (R46).

- DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.
- Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.
- Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u.U. geringfügig.

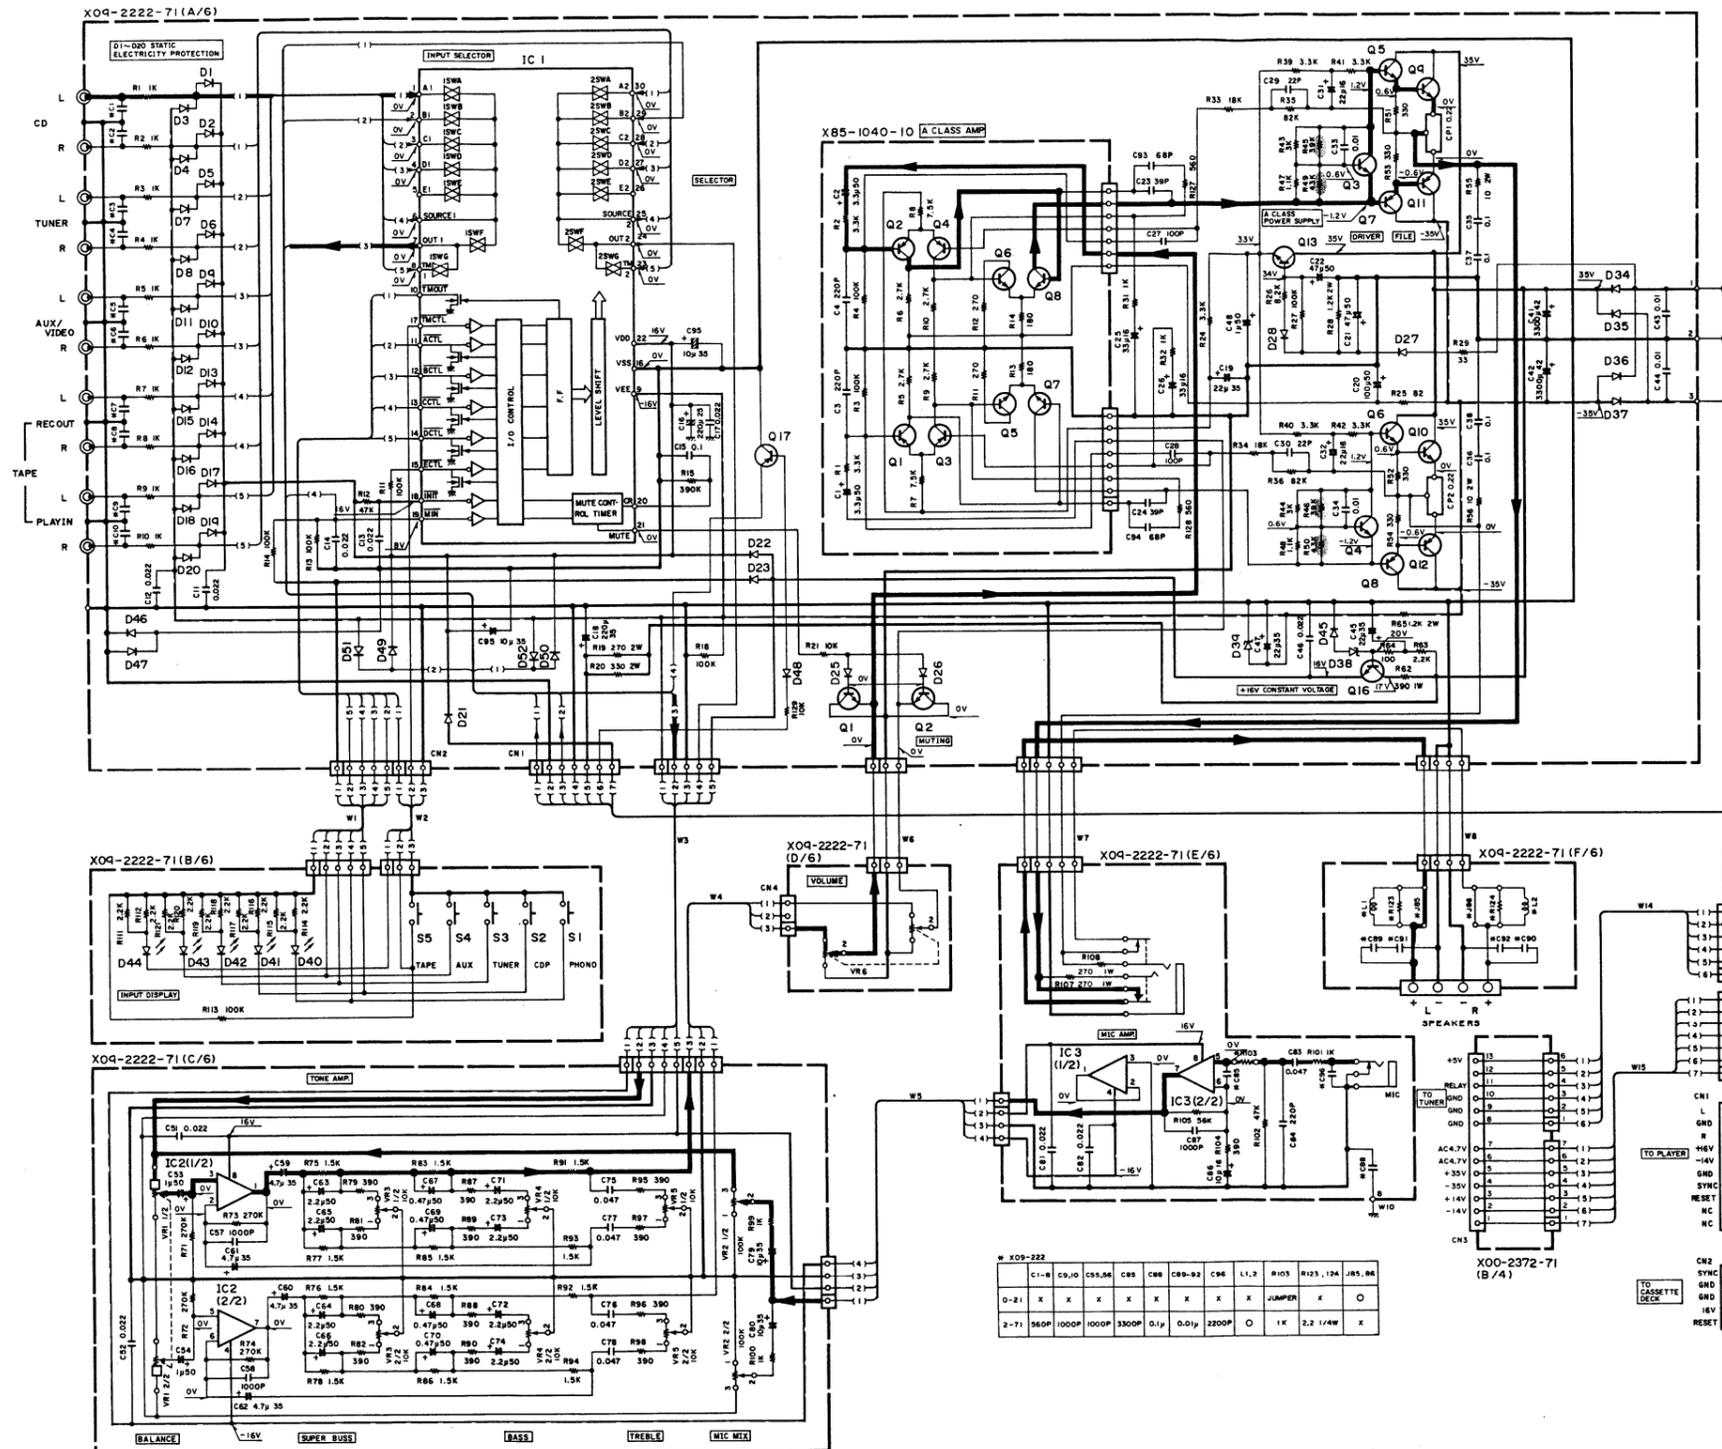

- X04-2222-71**
 Q1, 2, 13 : 2SC2320(E, F)
 Q3, 4 : 2SC445(A)(Q)
 Q5, 6 : 2SC2003(L, K)
 Q7, 8 : 2SA954(L, K)
 Q9, 10 : 2SC1845(G, P, Y)
 Q11, 12 : 2SA770(O, P, Y)
 Q16 : 2SC2060
 Q17 : 2SA733(A)(Q, P)
 D1-23, 25, 26, 45-52 : ISS133 or ISS176
 D27 : DSM1A1
 D28 : ISS133 or ISS178
 D34-37 : S3V20
 D38, 34 : RD16E (B2)
 D40-44 : S30-0431-05
 LC7818
 IC1 : UPC4570C or NJM2068D-D
 IC2 : AN6556
 IC3 : μPC78L05
- X85-1040-10**
 Q1-4 : 2SA992(F, E)
 Q5-8 : 2SC1845(F, E)

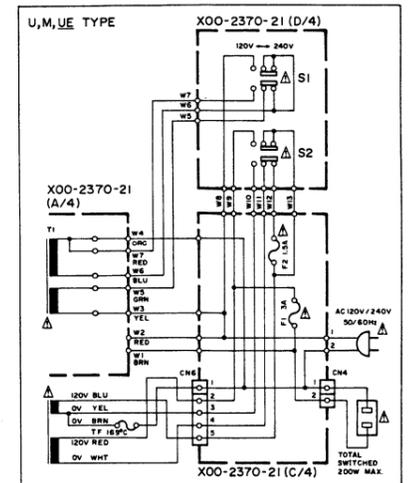

- X00-2372-71**
 Q1-3 : 2SC2320(E, F)
 Q4 : 2SC2167
 Q5 : 2SA957
 D1, 3-11 : DSM1A1
 D12, 13 : RD16E (B2)
 D14, 15 : ISS133 or ISS176
 IC1 : μPC78L05

- 2SA733 2SC2003 2SA770 2SA954 2SC2060 2SA957 2SA992 2SC2320 2SC1845 2SC945
- NJM2068D-D
- AN6556 μPC4570C
- μPC78L05
- LC7818

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

