

Request For Quotation


Order the parts you need from our real-time inventory database. Simply complete a request for quotation form with your part information and a sales representative will respond to you with price and availability.

[Request For Quotation](#)

Your free datasheet starts on the next page.

More datasheets and data books are available from our homepage: <http://www.datasheetarchive.com>

- Designed for Complementary Use with BD646, BD648, BD650 and BD652
- 62.5 W at 25°C Case Temperature
- 8 A Continuous Collector Current
- Minimum h_{FE} of 750 at 3V, 3 A

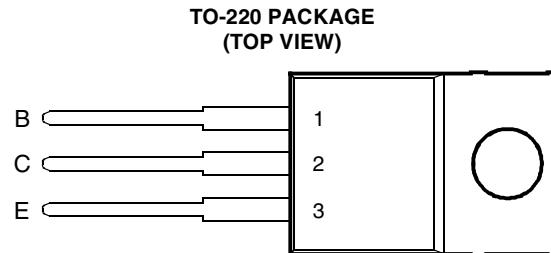

Pin 2 is in electrical contact with the mounting base.

MDTRACA

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING	SYMBOL	VALUE	UNIT
Collector-base voltage ($I_E = 0$)	V_{CBO}	80	V
		100	
		120	
		140	
Collector-emitter voltage ($I_B = 0$)	V_{CEO}	60	V
		80	
		100	
		120	
Emitter-base voltage	V_{EBO}	5	V
Continuous collector current	I_C	8	A
Peak collector current (see Note 1)	I_{CM}	12	A
Continuous base current	I_B	0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)	P_{tot}	62.5	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 3)	P_{tot}	2	W
Unclamped inductive load energy (see Note 4)	$\frac{1}{2}L I_C^2$	50	mJ
Operating junction temperature range	T_j	-65 to +150	°C
Storage temperature range	T_{stg}	-65 to +150	°C
Lead temperature 3.2 mm from case for 10 seconds	T_L	260	°C

NOTES: 1. This value applies for $t_p \leq 0.3$ ms, duty cycle $\leq 10\%$.

2. Derate linearly to 150°C case temperature at the rate of 0.4 W/°C.

3. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

4. This rating is based on the capability of the transistor to operate safely in a circuit of: $L = 20$ mH, $I_{B(on)} = 5$ mA, $R_{BE} = 100$ Ω,

$V_{BE(off)} = 0$, $R_S = 0.1$ Ω, $V_{CC} = 20$ V.

PRODUCT INFORMATION

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = 30 \text{ mA}$	$I_B = 0$	(see Note 5)	BD645 BD647 BD649 BD651	60 80 100 120		V
I_{CEO} Collector-emitter cut-off current	$V_{CE} = 30 \text{ V}$	$I_B = 0$		BD645		0.5	
	$V_{CE} = 40 \text{ V}$	$I_B = 0$		BD647		0.5	
	$V_{CE} = 50 \text{ V}$	$I_B = 0$		BD649		0.5	
	$V_{CE} = 60 \text{ V}$	$I_B = 0$		BD651		0.5	
I_{CBO} Collector cut-off current	$V_{CB} = 60 \text{ V}$	$I_E = 0$		BD645		0.2	
	$V_{CB} = 80 \text{ V}$	$I_E = 0$		BD647		0.2	
	$V_{CB} = 100 \text{ V}$	$I_E = 0$		BD649		0.2	
	$V_{CB} = 120 \text{ V}$	$I_E = 0$		BD651		0.2	
	$V_{CB} = 40 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BD645		2.0	
	$V_{CB} = 50 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BD647		2.0	
	$V_{CB} = 60 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BD649		2.0	
	$V_{CB} = 70 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BD651		2.0	
I_{EBO} Emitter cut-off current	$V_{EB} = 5 \text{ V}$	$I_C = 0$	(see Notes 5 and 6)			5	mA
h_{FE} Forward current transfer ratio	$V_{CE} = 3 \text{ V}$	$I_C = 3 \text{ A}$	(see Notes 5 and 6)	750			
$V_{CE(\text{sat})}$ Collector-emitter saturation voltage	$I_B = 12 \text{ mA}$	$I_C = 3 \text{ A}$	(see Notes 5 and 6)			2	V
	$I_B = 50 \text{ mA}$	$I_C = 5 \text{ A}$				2.5	
$V_{BE(\text{sat})}$ Base-emitter saturation voltage	$I_B = 50 \text{ mA}$	$I_C = 5 \text{ A}$	(see Notes 5 and 6)			3	V
$V_{BE(\text{on})}$ Base-emitter voltage	$V_{CE} = 3 \text{ V}$	$I_C = 3 \text{ A}$	(see Notes 5 and 6)			2.5	V

NOTES: 5. These parameters must be measured using pulse techniques, $t_p = 300 \mu\text{s}$, duty cycle $\leq 2\%$.

6. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			2.0	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	°C/W

PRODUCT INFORMATION

TYPICAL CHARACTERISTICS

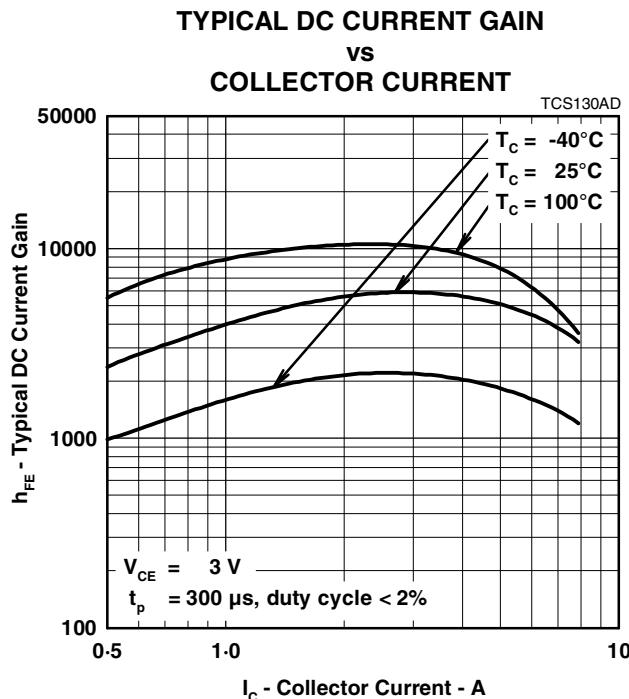


Figure 1.

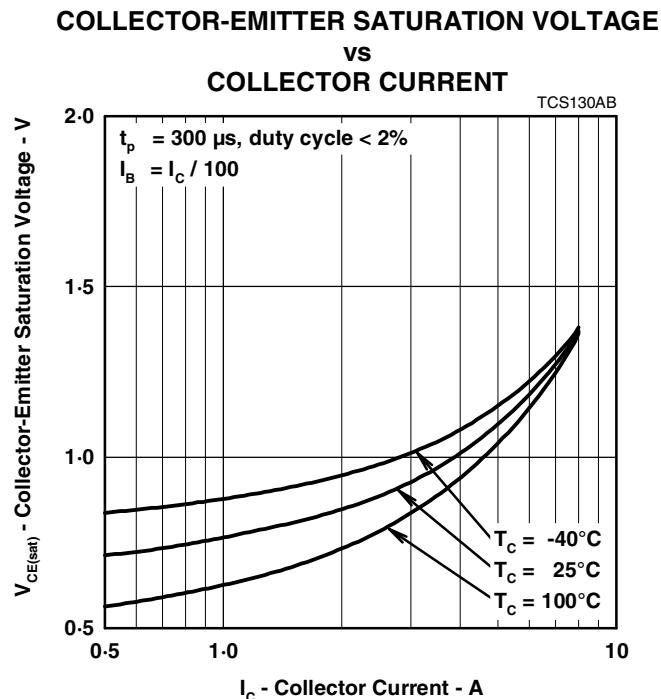


Figure 2.

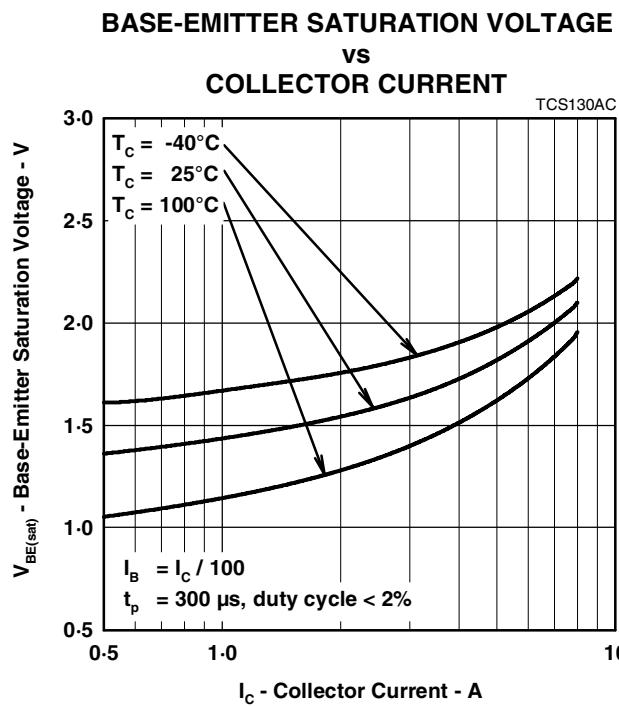


Figure 3.

PRODUCT INFORMATION

MAXIMUM SAFE OPERATING REGIONS

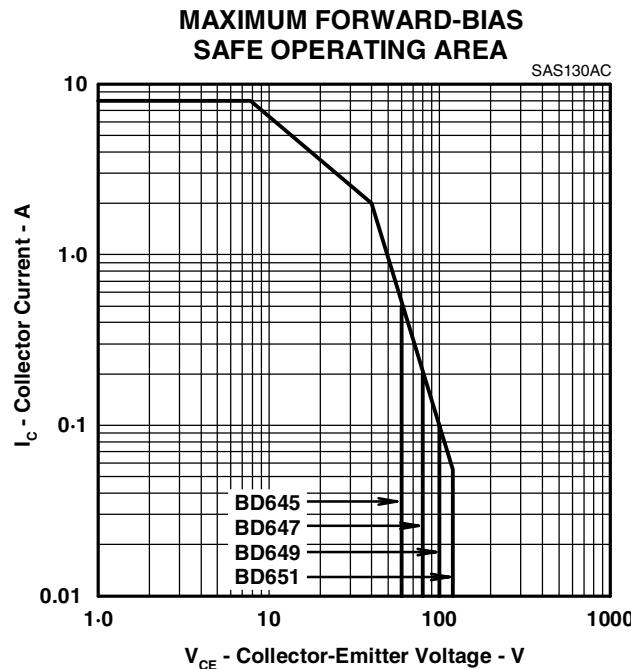


Figure 4.

THERMAL INFORMATION

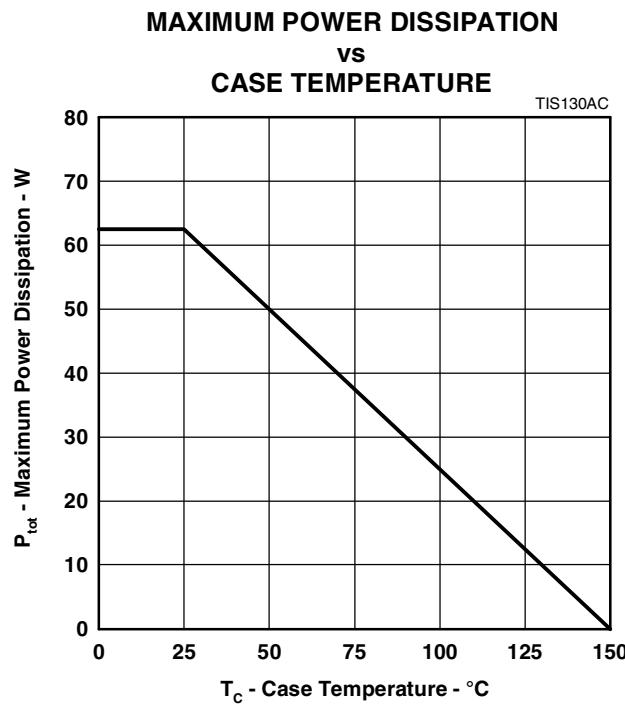


Figure 5.

PRODUCT INFORMATION

MAY 1993 - REVISED SEPTEMBER 2002


Specifications are subject to change without notice.

MECHANICAL DATA

TO-220

3-pin plastic flange-mount package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.

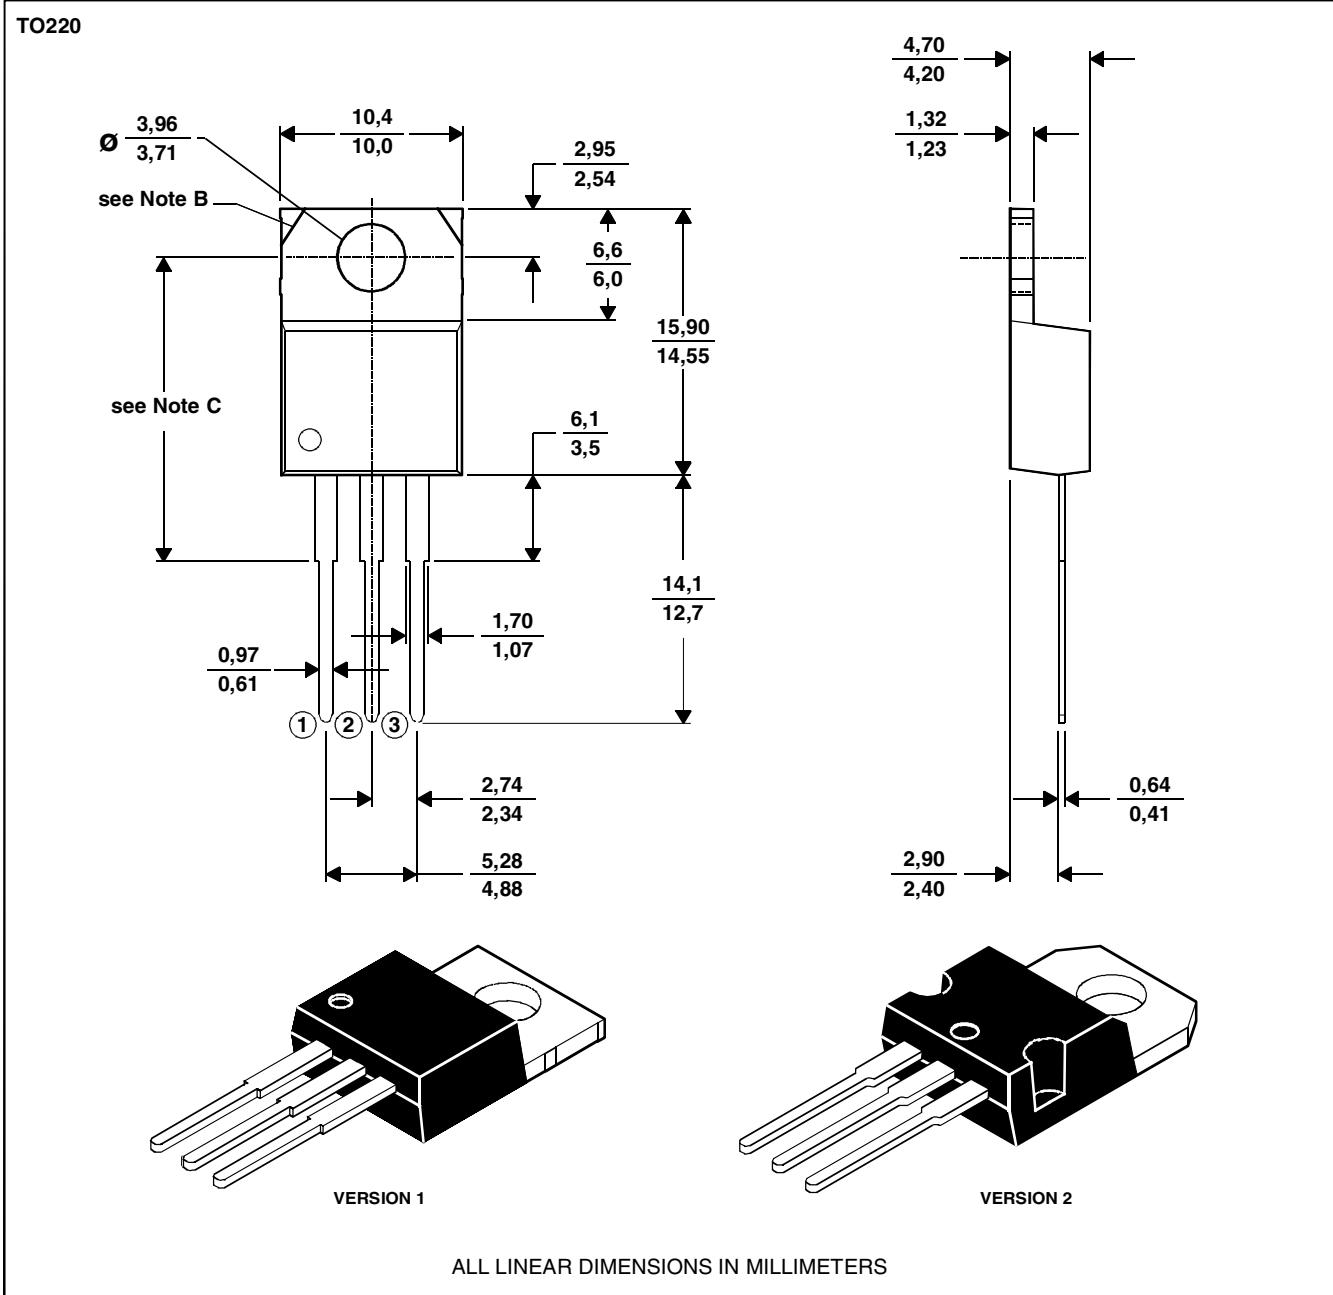

NOTES: A. The centre pin is in electrical contact with the mounting tab.

MDXXBE

B. Mounting tab corner profile according to package version.

C. Typical fixing hole centre stand off height according to package version.

Version 1, 18.0 mm. Version 2, 17.6 mm.

PRODUCT INFORMATION