


## J.F.K

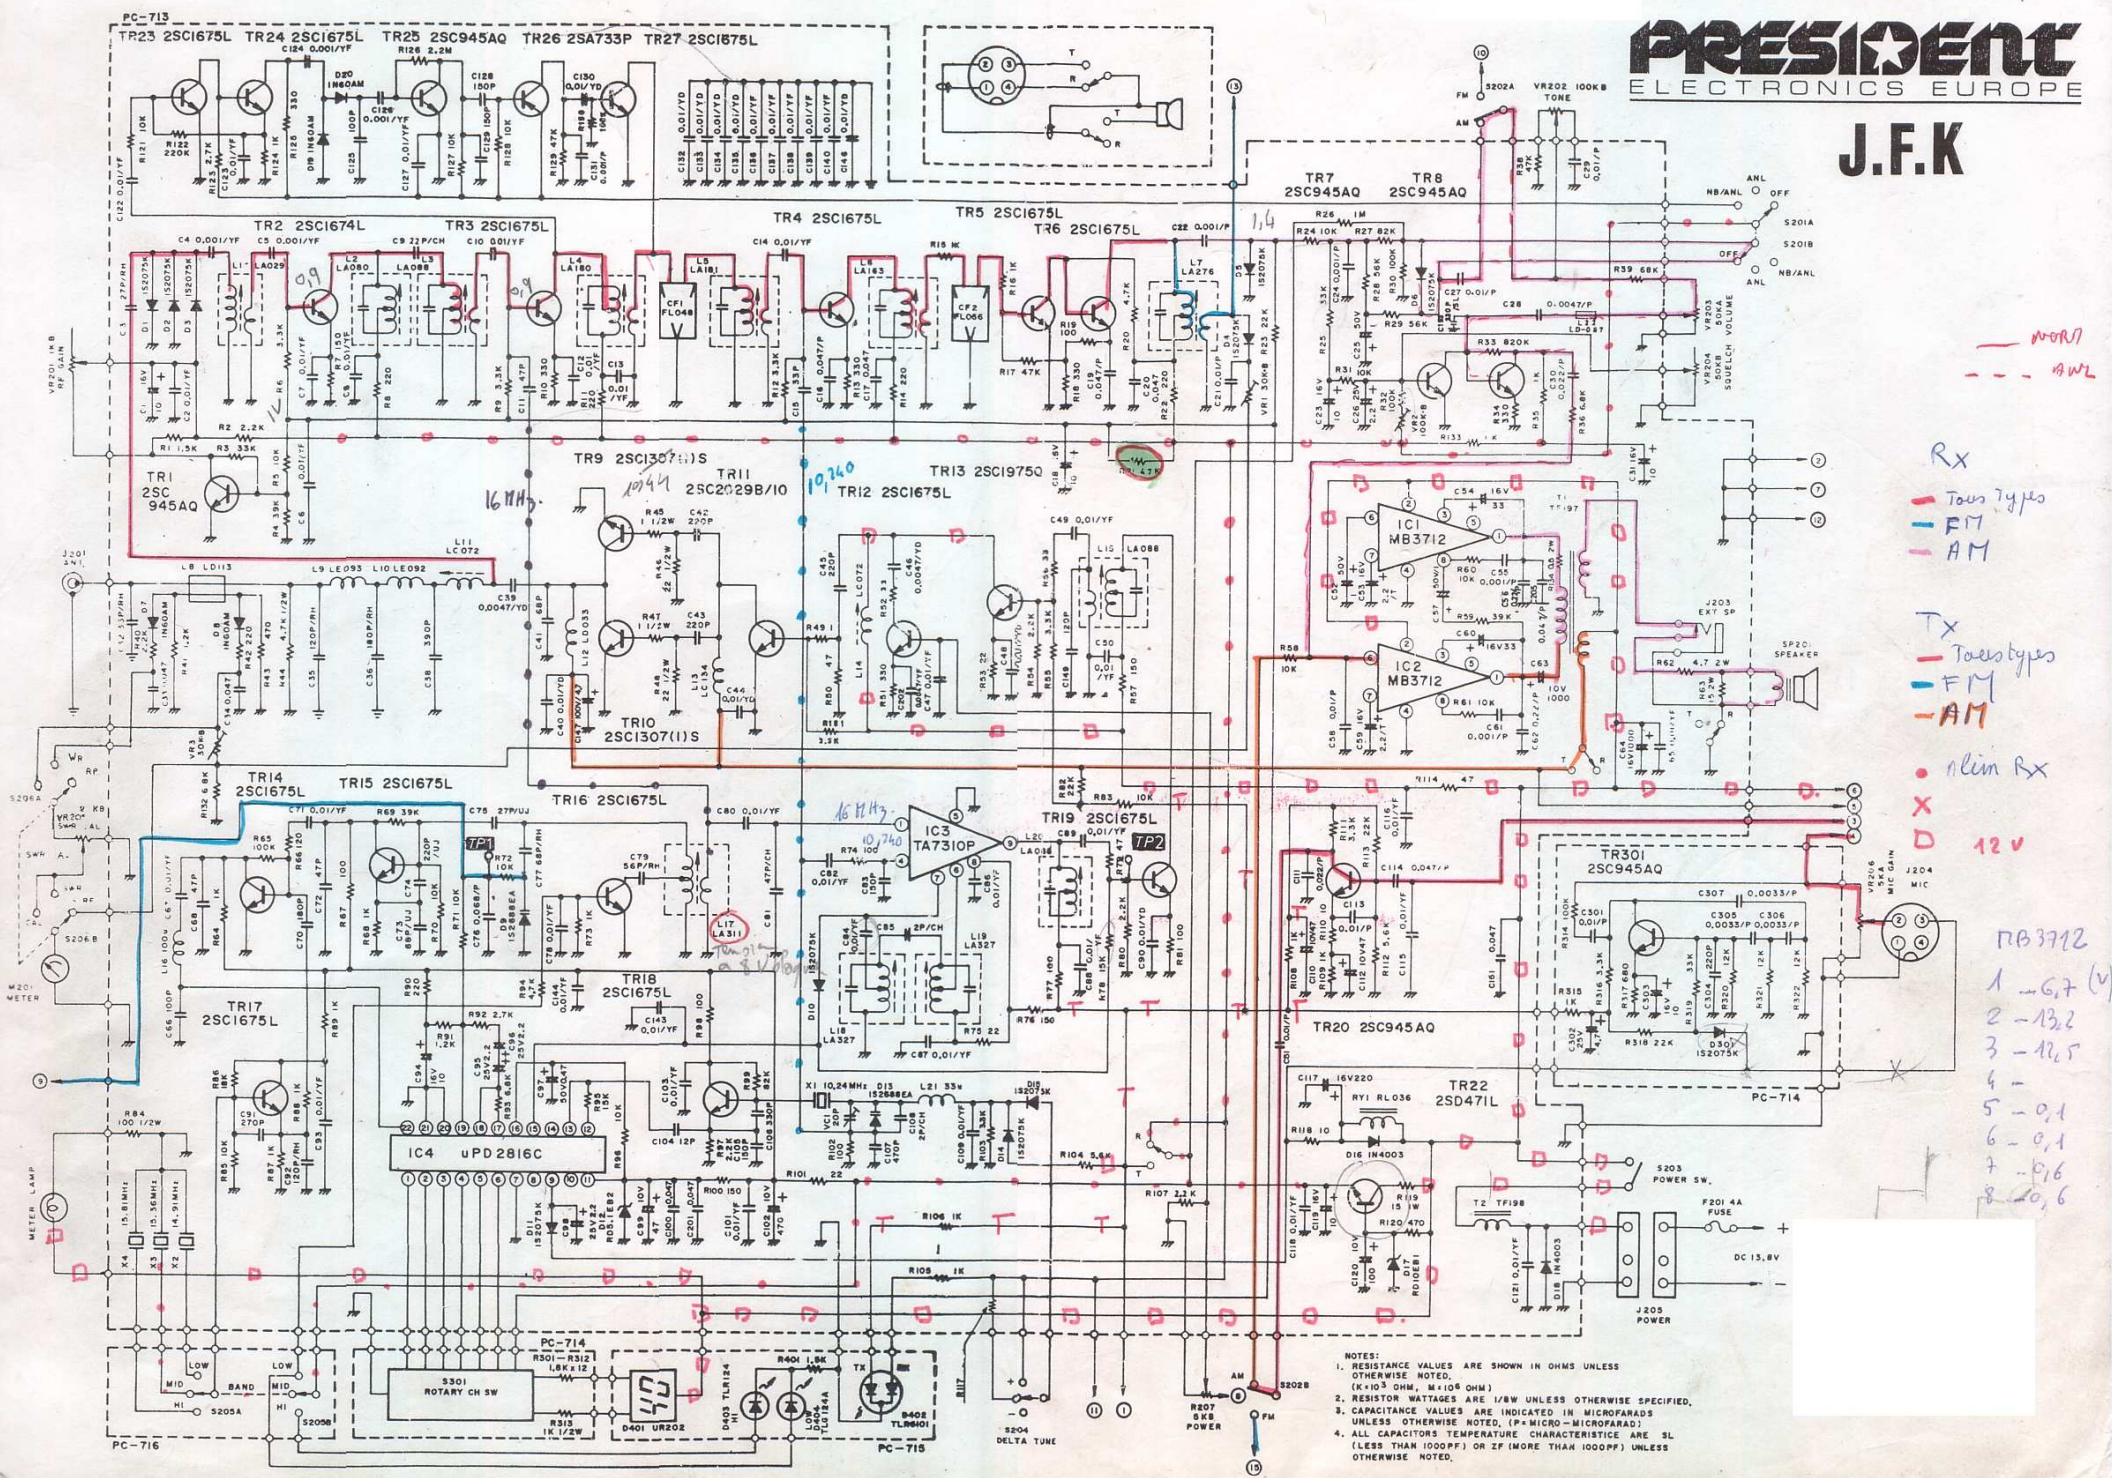

--- WORK  
 - - - - - AWL  
 Rx  
 - Trans Types  
 - FM  
 - AM  
 Tx  
 - Trans types  
 - FM  
 - AM  
 • Alim Rx  
 X  
 D 12V  
 PB3712  
 1 - G,7 (V)  
 2 - 13,2  
 3 - 12,5  
 4 -  
 5 - 0,1  
 6 - 0,1  
 7 - 0,16  
 8 - 0,6

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.  
(K=10<sup>3</sup> OHM, M=10<sup>6</sup> OHM)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED, (P=MICRO-MICROFARAD).
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTIC ARE SL (LESS THAN 100PPF) OR ZF (MORE THAN 100PPF) UNLESS OTHERWISE NOTED.