


APPLICATIONS

Power Supplies, Printers, Copy Machines, Microcomputers etc.

用途

安定化電源、プリンター、複写機、マイコン等。

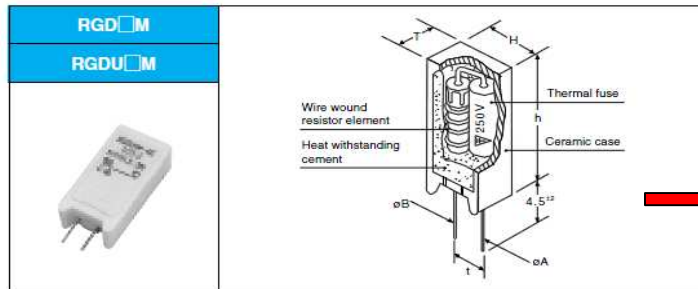

Model	Current Rating (A)	Dimensions (mm)						Fusing Temperature Code	Resistance Range (Ω)E12
		H	T	h	t	A	B		
RGD 2M	2	12	7	21	5	0.6	0.8	1 (110°C) 4E (137°C) 5E (146°C)	0.22 ~ 270
RGD 3M		12	8	26	5	0.6	0.8		0.27 ~ 680
RGD 5M		13	9	26	5	0.6	0.8		0.27 ~ 680
RGD 7M		13	9	38.5	5	1.0	1.0		0.68 ~ 1200
RGD 10M		16	13	35	7.5	1.0	1.0		1.0 ~ 1800
RGDU 2M		12	7	21	5	0.6	0.8		※1
RGDU 5M	13	9	26	5	0.6	0.8	※1	1.0 ~ 100	
RGDU 7M	13	9	38.5	5	1.0	1.0	※1	1.0 ~ 100	

10A thermal fuse is built in RGD2~RGD10.
UL Standard 1412, File No. E62418. (RGDU Types)