



# TCW060

## TCW060 2xTL-D58W HF

TCW060 - 2 pcs - MASTER TL-D - 58 W - Electronic high-frequency

Designed for use in demanding environments, TCW060 is an economical, compact waterproof luminaire. Dedicated versions are available for TL-D and TL5 lamps. Ingress-protected to a level of IP65 and operating solely on electronic gear, this is a competitive energy-saving solution for wet spaces – at the same cost as an electromagnetic solution. A flexible ceiling clip facilitates easy installation and maintenance.


### Product data

| General Information      |                                    |
|--------------------------|------------------------------------|
| Number of light sources  | 2 pcs                              |
| Lamp family code         | TL-D [ MASTER TL-D]                |
| Lamp power               | 58 W                               |
| Kombipack                | -                                  |
| Gear                     | HF [ Electronic high-frequency]    |
| Optical cover/lens type  | Polycarbonate bowl/cover prismatic |
| Emergency lighting       | -                                  |
| Connection               | Screw connection block 3-pole      |
| Glow-wire test           | Temperature 650 °C, duration 5 s   |
| Country version          | NO [ Norway]                       |
| CE mark                  | CE mark                            |
| Product family code      | TCW060 [ TCW060]                   |
| Operating and Electrical |                                    |
| Input Voltage            | 220 to 240 V                       |


| Mechanical and Housing               |   |
|--------------------------------------|---|
| Fixation point length distance (Nom) | 1200 mm                                       |
| Overall length                       | 1570 mm                                       |
| Approval and Application             |   |
| Ingress protection code              | IP65 [ Dust penetration-protected, jet-proof] |
| Mech. impact protection code         | IK08 [ 5 J vandal-protected]                  |
| Application Conditions               |   |
| Suitable for random switching        | No  |
| Product Data                         |   |
| Full product code                    | 871155981382099                               |
| Order product name                   | TCW060 2xTL-D58W HF                           |
| EAN/UPC - Product                    | 8711559813820                                 |
| Order code                           | 910503611118                                  |
| Numerator - Quantity Per Pack        | 1   |
| Numerator - Packs per outer box      | 6   |

# TCW060

|                     |              |
|---------------------|--------------|
| Material Nr. (12NC) | 910503611118 |
| Net Weight (Piece)  | 2.850 kg     |





## Dimensional drawing

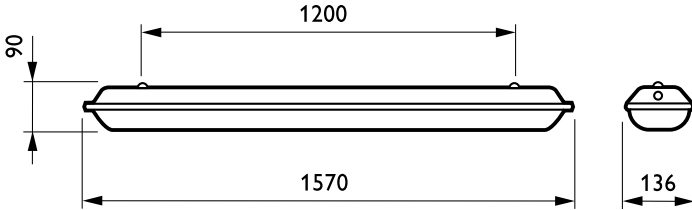

## TCW060

## Photometric data

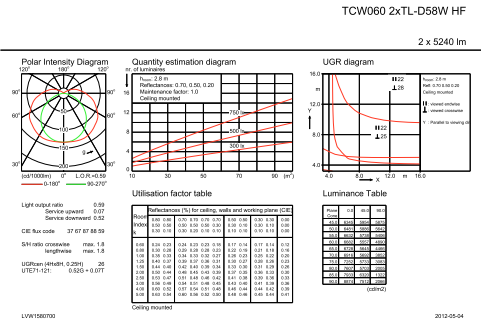

## IFGU1\_TCW060 2xTL-D58W HF.EPS

## IFPC1\_TCW060 2xTL-D58W HF.EPS

